
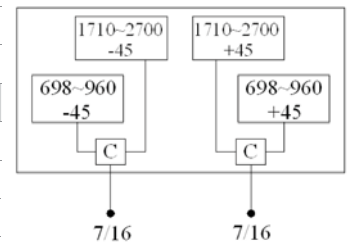


P5827310

Dual Band | Panel Antenna | XX-Pol | 65° / 55° | 11.2 / 12.5 dBi | Fixed Tilt | Diplexed

- Dual band, XX-Pol, fixed tilt, diplexed, panel antenna
- Mounting and downtilt brackets included


Electrical Characteristics		698-960 MHz		1710-2700 MHz	
Frequency Bands (MHz)		698-806	806-960	1710-2200	2200-2700
Polarization		±45°		±45°	
Horizontal Beamwidth		70°	65°	70°	65°
Vertical Beamwidth		34°	32°	25°	20°
Gain		11.0 dBi	11.2 dBi	11.8 dBi	12.5 dBi
Electrical Downtilt		0°		0°	
Impedance		50Ω			
VSWR		≤ 1.9		≤ 1.9	
Front-to-Back Ratio		≥ 20 dB			
Isolation		≥ 20 dB			
IM3 (2x43dBm carrier)		≤ -150 dBc			
Input Power		200 W			
Total Number of Connectors		Antennas has 2 connectors located on the back			
Connectors Per Band, Type, Location	698-960/1710-2700 Diplexed	2 Connectors / 7/16-DIN Female / Back			
Diplexed		Yes			
Lightning Protection		DC Ground			
Operating Temperature		-40° to +60° C (-40° to +140° F)			
Mechanical Characteristics					
Radome Material / Color		UPVC / Gray			
Dimensions (Length x Width x Depth)		920 x 280 x 125 mm		36.2 x 11.0 x 4.9 in	
Weight without Mounting Brackets		8 kg		17.6 lbs	
Packing Dimensions (LxWxD)		1170 x 375 x 160 mm		46.1 x 14.8 x 6.3 in	
Survival Wind Speed		216 km/hr		134 mph	
Mounting Characteristics		Fit Pipe Diameter			
Mounting and Downtilt Kit (included)		Ø35-Ø75 mm		Ø1.4-Ø3.0 in	

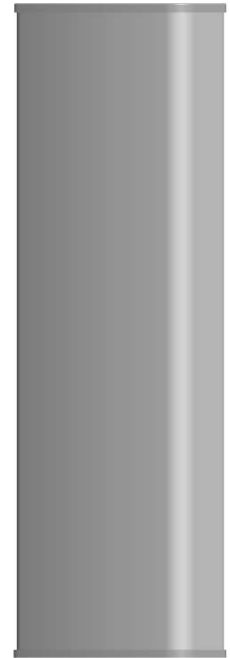

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

P5827310

Dual Band | Panel Antenna | XX-Pol | 65° / 55° | 11.2 / 12.5 dBi | Fixed Tilt | Diplexed

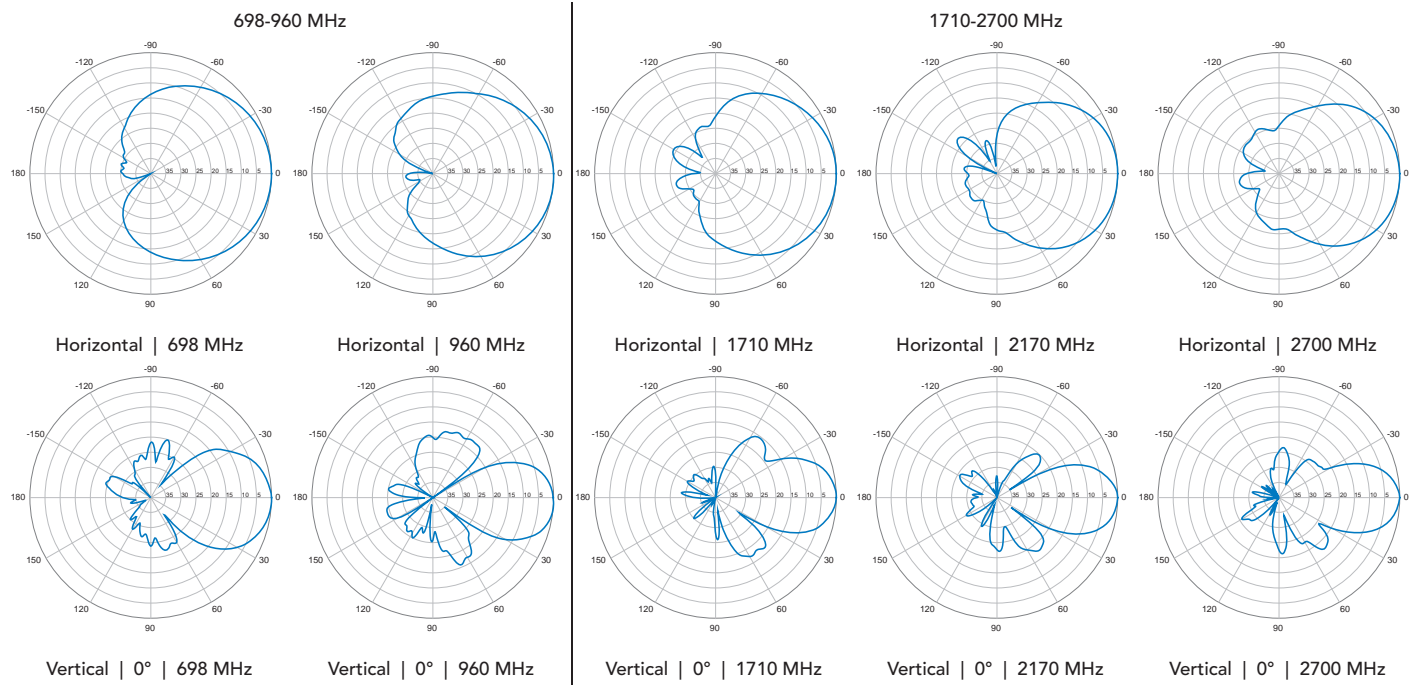

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.