

TP-xxML-43F-CC

This model was previously released as ATP-xx-WBM-LP-43F-CC

Tapper | 4.3/10 Female


Features

- Operates in 698-2700 MHz frequency range
- Low PIM value
- Minimal RF insertion loss
- 500W average power rating
- RoHS compliant



Ordering Options		
Model Number (xx)		TP-20ML-43F-CC
Electrical Characteristics		
Frequency Range (MHz)		698-2700
VSWR		≤ 1.35
Power Handling	Average	500 W
	Peak	1.5 kW
IM3 (2x20W)		≤ -153 dBc
Impedance		50Ω
Insertion Loss (main line)		0.1 ±0.1 dB
Coupling		20 dB
Coupling Tolerance		±1.5 dB
Mechanical Characteristics		
Connector		4.3/10 Female
Environmental Characteristics		
Operating Temperature		-35° C to +70° C
Application		Indoor / Outdoor
Protection Class		IP65

Dimensions

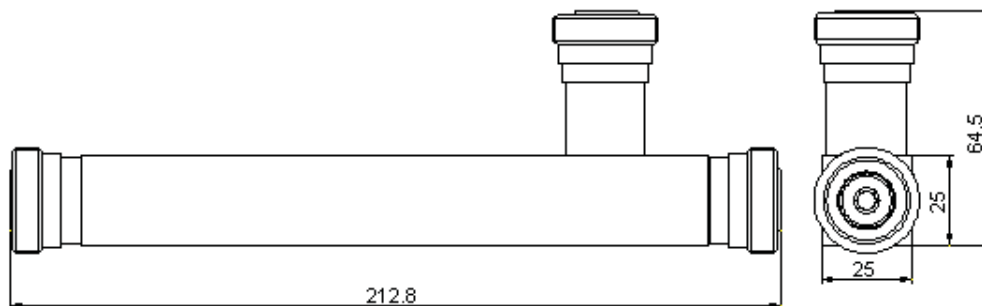

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.