

WBX065X13Fx00

Single Band | Panel Antenna | X-Pol | 65° | 17.4 dBi | Fixed Tilt

Ordering Options

When ordering, replace the "x" in the model number with the desired electrical downtilt. Select from the options listed below under Electrical Downtilt.

Mounting bracket kits and other accessories are ordered separately.

Electrical Characteristics		1710-2170 MHz					
Frequency Bands		1710-1880 MHz	1850-19	90 MHz	1900-21	70 MHz	
Polarization	±45°						
Horizontal Beamwidth		68°	68° 65°		60°		
Vertical Beamwidth		7°	7	0	7	70	
Gain		16.6 dBi	17.0	dBi	17.4	l dBi	
Electrical Downtilt (°)		(x) 0, 2, 4, 8					
Impedance		50Ω					
VSWR		< 1.4:1					
Upper Sidelobe Suppression		< -17 dB					
Front-to-Back Ratio		> 30 dB					
In Band Isolation		> 28 dB					
IM3 (2x20W carrier)		< -150 dBc					
Input Power		300 W					
Connectors, Type, Location		2 Connectors / 7/16-DIN Female / Bottom					
Diplexed		No					
Lightning Protection		Direct Ground					
Operating Temperature		-40° to +60° C (-40° to +140° F)					
Mechanical Characteristics							
Dimensions (Length x Width x Depth)		1372 x 160 x 84	mm	54	.0 x 6.3 x 3.3	in	
Weight without Mounting Brackets		4.5	kg		9.9	lbs	
Survival Wind Speed		241	km/hr		150	mph	
Wind Loads	Front	264	N		59	lbf	
(160 km/hr or 100 mph)	Side	139	N		31	lbf	





WBX065X13Fx00


Single Band | Panel Antenna | X-Pol | 65° | 17.4 dBi | Fixed Tilt

Mounting Options	Part Number	lmage	Fits Pipe Diameter	Weight				
All mounting bracket kits are ordered separately unless otherwise indicated. Select from the options listed below.								
2-Point Mounting Bracket Kit	MKS02P01		40-115 mm 1.6-4.5 in	2.9 kg 6.5 lbs				
2-Point Scissor Tilt Bracket Kit	MKS02T06		40-115 mm 1.6-4.5 in	3.8 kg 8.3 lbs				



WBX065X13Fx00

Single Band | Panel Antenna | X-Pol | 65° | 17.4 dBi | Fixed Tilt

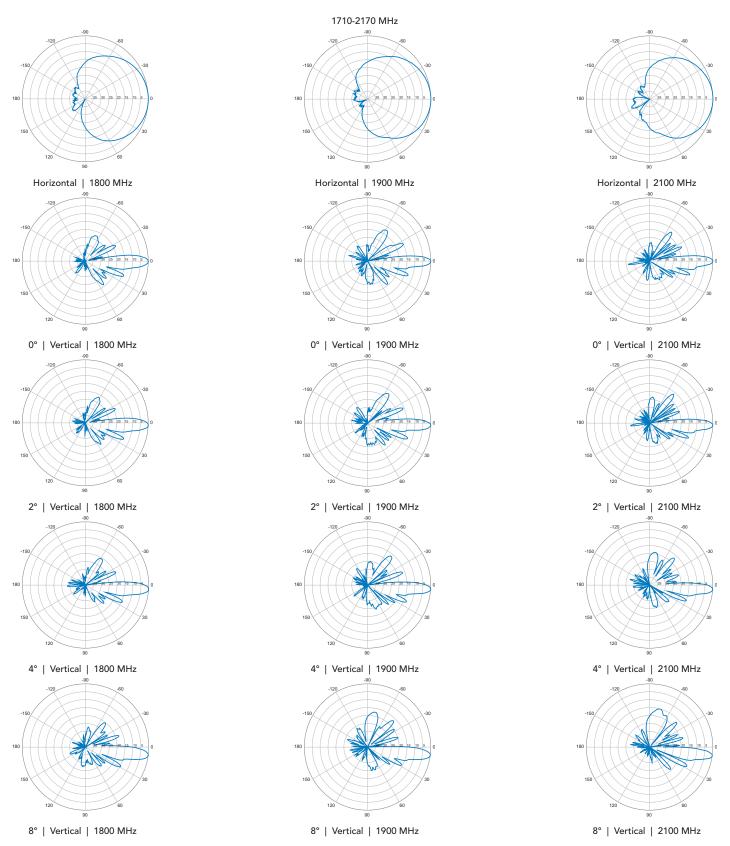

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.